


Cistern Taps

PRODUCT CODES:

- 49957 (Tamper Resistant)
- 49953 (Vandal Resistant)
- 48868 (Stirling)

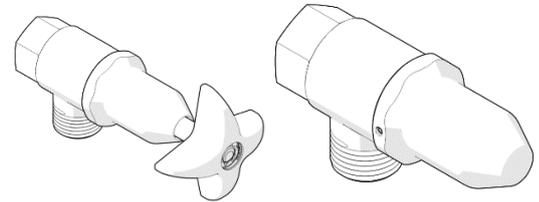

SPECIFICATIONS

- Chrome plate finish for easy cleaning and durability.
- Tamper resistant cover to prevent isolation valve being interfered with. (Tamper Resistant)
- Vandal resistant handle with locking ring to secure the handle to the spindle which may only be removed using the key provided. (Vandal Resistant)

IMPORTANT: All cistern taps are tested in accordance with AS/NZS 3718 and leave our premises in good working order.

TECHNICAL DATA

Inlet	1/2" BSP	
Outlet	1/2" BSP	
Headwork	Jumper Valve	
Working Pressure Range (kPa)	Min	100
	Max	500
Working Temperature Range (°C)	Min	5
	Max	80
Nominal Flow Rate (LPM)	N/A	
Finish	Chrome	


NOTE: Galvin Engineering continually strive to improve their products. Specifications may change without notice.

TOOLS REQUIRED


- Spanner or adjustable crescent
- Thread tap or sealant

PRE-INSTALLATION


- Before installation, all lines must be flushed. We recommend that a line strainer be installed prior to Vandal Resistant Deluxe Bib taps to eliminate any foreign material.

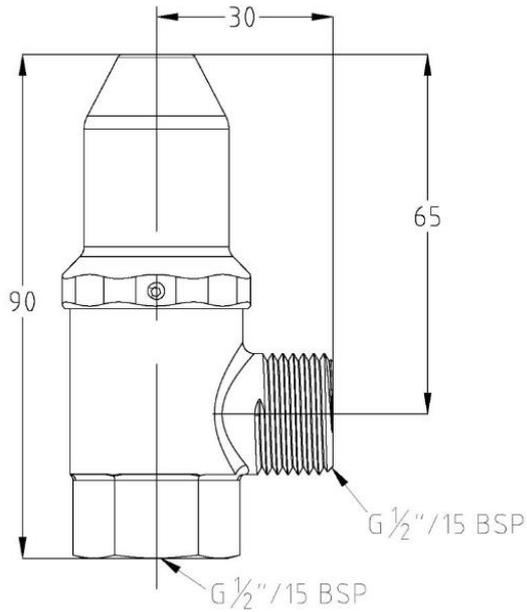

49957

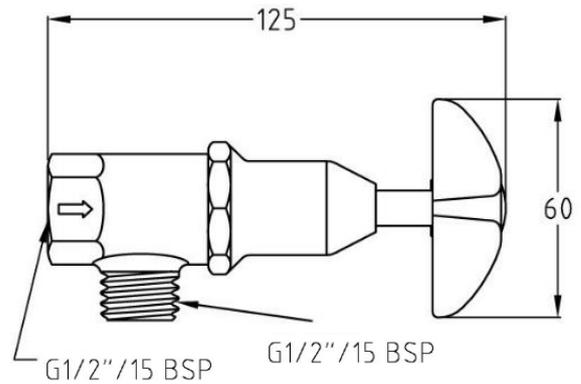


49953

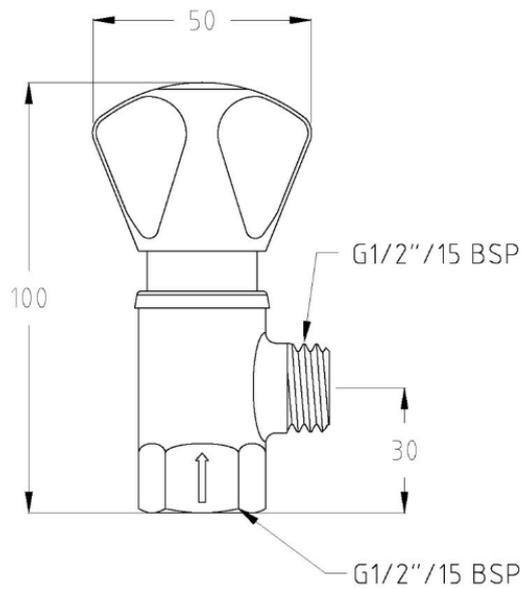

48868


INSTALLATION

IMPORTANT: Galvin Engineering products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.

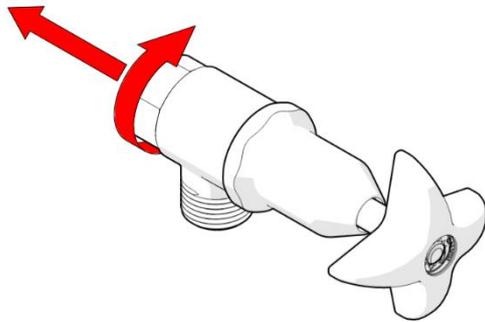


1. Fit tap assembly

- Fit the tap assembly to the inlet and tighten against the wall using spanner
- Ensure the opening in the inlet is not obscured. Failure to do so may restrict or block the flow restrictor, affecting the flow of water.

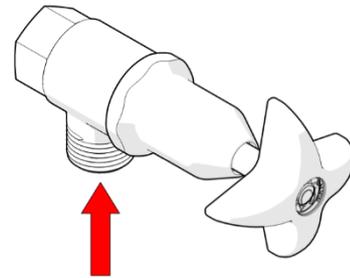

2. Connect Hose

- Connect hose to the outlet and tighten to ensure no leakage

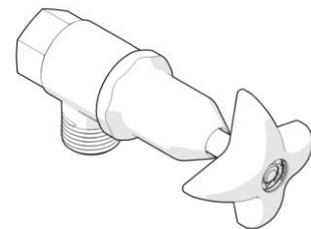

3. Testing

- Once fitted turn on water and check for leaks and correct operation.

TROUBLESHOOTING

PROBLEM	CAUSE	RECTIFICATION
Tap is leaking	Cartridge damaged	Remove and inspect the cartridge, remove debris and/or replace if damaged.
	Tap incorrectly installed	Follow the installation steps above when fitting the tap.
Water is not flowing or inconsistent flow.	Blocked inlet/ dirt in the cartridge / water supply not on.	Remove tap from inlet and remove debris. Install an inline strainer to stop further blockages. Ensure water supply is turned on.
Continous flow of water.	Top assembly cartridge loose or internally obstructed or damaged.	Remove cartridge, clean with water and re-grease spindle if required.

WARRANTY

The warranty set forth herein is given expressly and is the only warranty given by the Galvin Engineering Pty Ltd. With respect to the product, Galvin Engineering Pty Ltd makes no other warranties, express or implied. Galvin Engineering Pty. Ltd. hereby specifically disclaims all other warranties, express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

Galvin Engineering Pty Ltd products are covered under our manufacturer's warranty available for download from www.galvinengineering.com.au Galvin Engineering Pty Ltd expressly warrants that the product is free from operational defects in workmanship and materials for the warranty period as shown on the schedule in the manufacturer's warranty. During the warranty period, Galvin Engineering will replace or repair any defective products manufactured by Galvin Engineering without charge, so long as the terms of the Manufacturer's warranty are complied with.

The remedy described in the first paragraph of this warranty shall constitute the sole and exclusive remedy for breach of warranty, and Galvin Engineering Pty Ltd shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labour charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, electrical or any other circumstances over which Galvin Engineering has no control. This warranty shall be invalidated by any abuse, misuse, misapplication, improper installation or improper maintenance or alteration of the product.

Within Australia: 1300 514 074 Outside Australia: P: +61 (0)8 9338 2344

F: +61 (0)8 9338 2340

sales@galvinengineering.com.au

www.galvinengineering.com.au

ABN: 78 008 719 382

PERTH | SYDNEY | MELBOURNE | BRISBANE | ADELAIDE

