

## **Product Installation Guidelines**

Version 1, 11 January 2022, Page 1 of 3

CliniMix<sup>®</sup> Lead Safe<sup>™</sup> Progressive Shower Non Return Valve & Strainer Assembly (Pair)

# **PRODUCT CODES**

- 100.90.72.20




### **SPECIFICATIONS**

- The valve & strainer assemblies are made of Lead Safe\* DR Brass
- \* As 'lead free' is not currently defined by low in Australia and New Zealand, we have based our definition of Lead Safe™ on the requirements of s1417 of the USA's Safe Drinking Water Act (SDWA) and the relevant US standards NSF61 / NSF372. The SDWA defines 'lead free' as "not more than a weighted average of 0.25% lead when used with respect to the wetted surface of pipes, pipe fittings, plumbing fittings and fixtures".


TECHNICAL DATA				
Working Pressure Range (kPa)	Min	20		
	Max	500		
Working Temperature Range (°C)	Min	5		
	Max	85		
Nominal Flow Rate (LPM)		N/A		
Construction		DZR Brass		
Finish		DZR Brass		

**NOTE:** Galvin Engineering continually strive to improve their products. Specifications may change without notice.

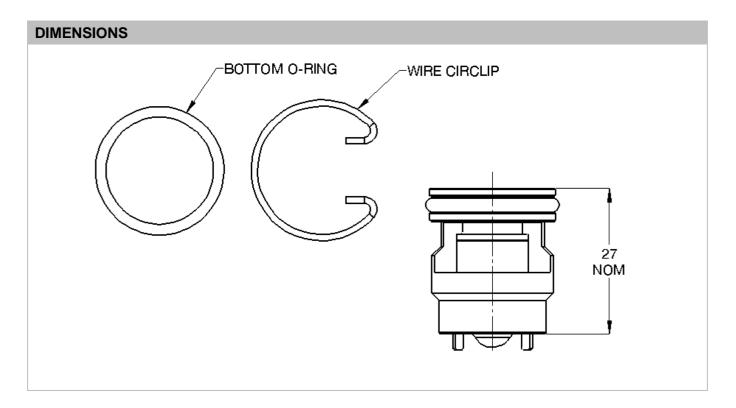


#### **INSTALLATION**

**INSTALLATION COMPLIANCE:** Galvin Engineering products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.

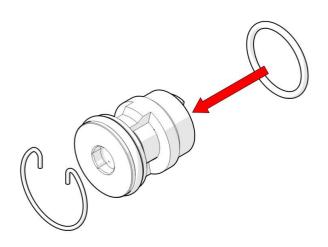


### 1. Fit the rear O-ring

 Fit the other supplied o-rings to the rear sides of the assemblies to be inserted,

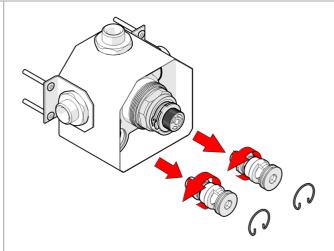

#### 2. Remove the old assemblies

 Remove the two wire clips and unscrew the two assemblies. As they are removed the water supply to the valve will be isolated.

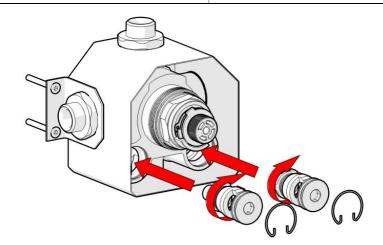

# 3. Fit the new assemblies to the mixer body

- Screw the two assemblies to the mixer body and place the wire clips in position.

TROUBLESHOOTING			
PROBLEM	CAUSE	RECTIFICATION	
The desired mixed water temperature cannot be obtained, or valve is difficult to set.			
Mix temperature unstable.	Strainers contain debris	Clean strainers of debris	
Mix temperature changing over time			
Water is not flowing from outlet.			

#### WARRANTY

The warranty set forth herein is given expressly and is the only warranty given by the Galvin Engineering Pty Ltd. With respect to the product, Galvin Engineering Pty Ltd makes no other warranties, express or implied. Galvin Engineering Pty. Ltd. hereby specifically disclaims all other warranties, express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

Galvin Engineering Pty Ltd products are covered under our manufacturer's warranty available for download from www.galvinengineering.com.au Galvin Engineering Pty Ltd expressly warrants that the product is free from operational defects in workmanship and materials for the warranty period as shown on the schedule in the manufacturer's warranty. During the warranty period, Galvin Engineering will replace or repair any defective products manufactured by Galvin Engineering without charge, so long as the terms of the Manufacturer's warranty are complied with.

The remedy described in the first paragraph of this warranty shall constitute the sole and exclusive remedy for breach of warranty, and Galvin Engineering Pty Ltd shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labour charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, electrical or any other circumstances over which Galvin Engineering has no control. This warranty shall be invalidated by any abuse, misuse, misapplication, improper installation or improper maintenance or alteration of the product.

Within Australia: 1300 514 074 Outside Australia: P: +61 (0)8 9338 2344

F: +61 (0)8 9338 2340 sales@galvinengineering.com.au

www.galvinengineering.com.au ABN: 78 008 719 382

PERTH I SYDNEY I MELBOURNE I BRISBANE I ADELAIDE



