


Product Installation Guidelines

Wallgate Pan Rear Fixing Kit

PRODUCT CODE

- 123.94.00.90



SPECIFICATIONS

- Allows secure installation of any Wallgate pan by fixing through the rear wall.
- Tamper resistant fixings included for high levels of security.


IMPORTANT: This kit is to be used for Wallgate WC Pan installation only.

WARNINGS: Special attentions to be paid on notes, photos, images, or drawings of assembly steps marked with the warning symbol.



INSTALLATION

INSTALLATION COMPLIANCE: Galvin Engineering products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.

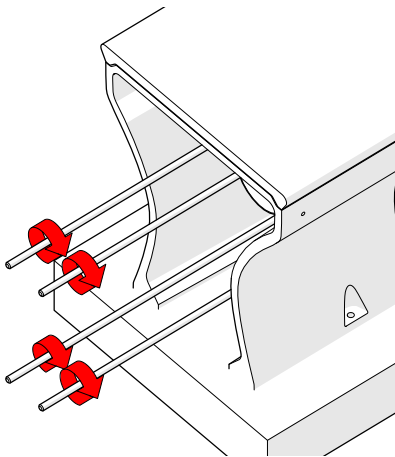


1. Install threaded rods

- Install the threaded rods into the threaded holes in the rear of the pan
- Measure the rod positions and mark on the wall where the pan is to be installed.
- Ensure the rods are straight and perpendicular to the wall.



Note: Pan dimensions can vary. Check pan documentation for details and measure before installing.

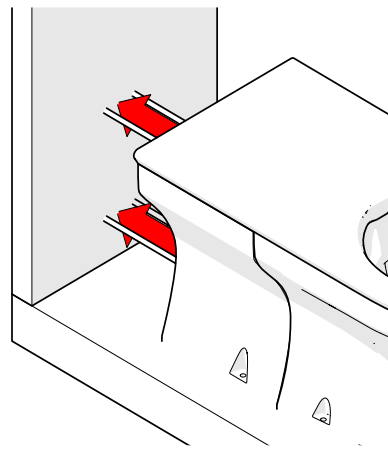


2. Install against wall

- Drill through the wall in the marked positions.
- Fit the rods through the holes so the pan sits against the wall. The pan must be resting firmly on the floor.



Note: If using a 90° WC connector pipe, only the top fixing rods can be used.

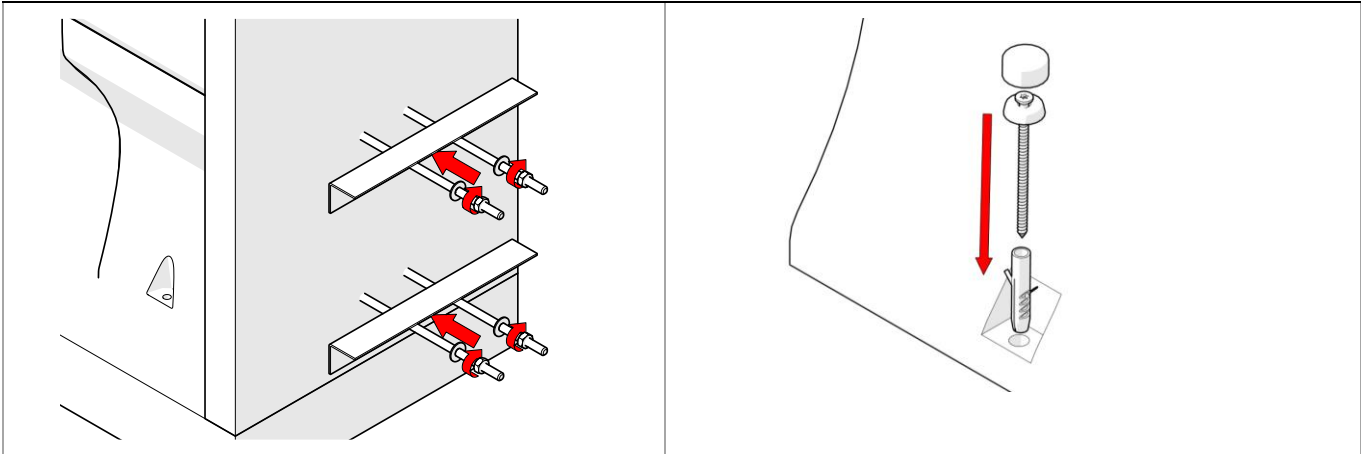

3. Rear Fixings

- At the rear of the wall, fit the provided L-brackets over the protruding threaded rods.
- Secure in place against the wall with provided nuts and washers.


4. Floor Fixings – for concrete only

- Drill an 8mm diameter hole a minimum of 55mm into the solid substrate below the pan at the fixing location and insert the rawl plug.
- Insert the cap base onto the screw and screw into the plug.
- Fix the white cap outer to the cap base.
- Repeat at all four fixing points.



Note: The floor fixings are designed for a solid base such as concrete or brick. If installing onto any other substrate, suitable fixings must be sourced by the installer.

ROD DIMENSIONS

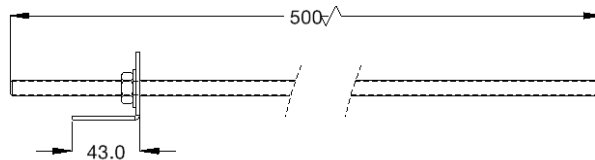

WARRANTY

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit www.galvinengineering.com.au to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.