

Product Installation Guidelines

Version 1, 17 April 2024, Page 1 of 2
Document no: 123.94.01.90

Wallgate Pan Front Fixing Kit

PRODUCT CODE

- 123.94.01.90



SPECIFICATIONS

- Allows for installation of the Wallgate pan where fixing through the wall is not possible.
- Tamper resistant fixings included for high levels of security.



IMPORTANT: This kit is to be used with Wallgate WC pans as an alternative to the through-wall rear fixing.

WARNINGS: Special attentions to be paid on notes, photos, images, or drawings of assembly steps marked with the warning symbol.



INSTALLATION

INSTALLATION COMPLIANCE: Galvin Engineering products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.

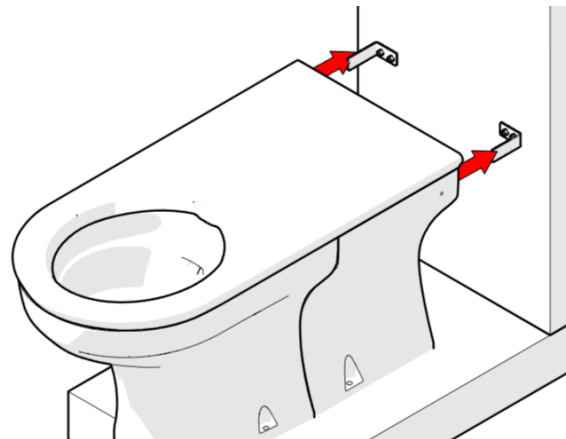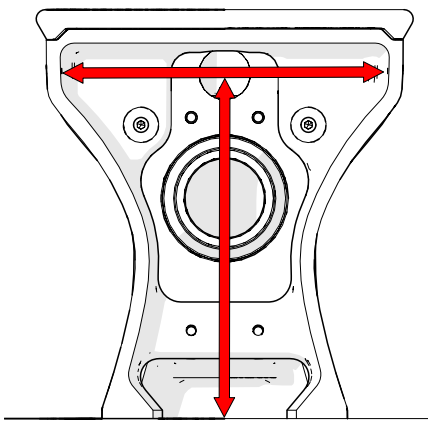

1. Measure bracket position





- Measure the top distance between the internal surfaces of the pan and the height off the floor.
- Mark bracket position on wall where pan is to be installed.



Note: Pan dimensions can vary. Check pan documentation for details and measure before installing.

2. Bracket install

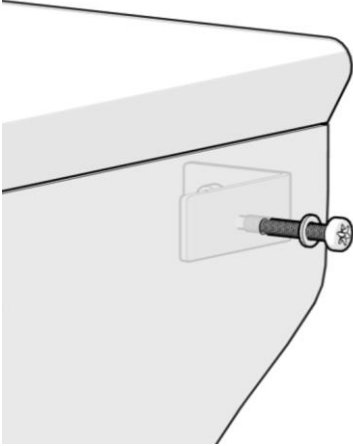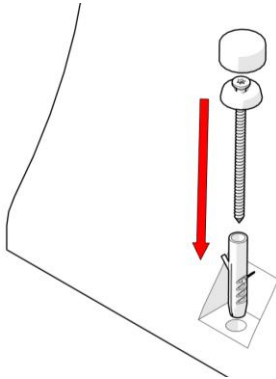- Fix brackets to wall through pre-drilled holes using suitable fasteners for the wall construction (not supplied), spaced according to measured dimensions.
- Locate pan in place on the brackets, ensuring it rests firmly on the floor.

	
<h3>3. Pan fixings</h3> <ul style="list-style-type: none"> - Using the provided self drilling screws with washers, screw through the pan and into the bracket - Repeat on both sides. <p> Note: Take care when drilling to avoid cracks in the ceramic pan.</p>	<h3>4. Floor Fixings</h3> <ul style="list-style-type: none"> - Drill an 8mm diameter hole a minimum of 55mm into the solid substrate below the pan at the fixing location and insert the rawl plug. - Insert the cap base onto the screw and screw into the plug. - Fix the white cap outer to the cap base. - Repeat at all four fixing points. <p> Note: The floor fixings are designed for a solid base such as concrete or brick. If installing onto any other substate, suitable fixings must be sourced by the installer.</p>

WARRANTY

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit www.galvinengineering.com.au to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.