




# Ezy-Drink<sup>®</sup> CP-BS Lead Safe<sup>™</sup> Hob Mounted Jug Filler Tap

## PRODUCT CODES:

- 170.13.36.00



## SPECIFICATIONS

- Chrome plated assembly for durability and easy cleaning
- Lead Safe<sup>™</sup> brass construction

**IMPORTANT:** All Ezy-Drink<sup>®</sup> Bottle Filler taps are tested in accordance with AS/NZS 3718 and leave our premises in good working order.

As 'lead free' is not currently defined by law in Australia and New Zealand, we have based our definition of Lead Safe<sup>™</sup> on the requirements of s1417 of the USA's Safe Drinking Water Act (SDWA) and the relevant US standards NSF61 / NSF372. The SDWA defines 'lead free' as "not more than a weighted average of 0.25% lead when used with respect to the wetted surface of pipes, pipe fittings, plumbing fittings and fixtures".

## TECHNICAL DATA

Inlet	1/2" BSP – Male	
Outlet	Gooseneck	
Headworks	Push Button	
Working Pressure Range (kPa)	Min	50
	Max	500
Working Temperature Range (°C)	Min	5
	Max	60
Nominal Flow Rate (LPM)	4.01	
Construction	Brass	
Finish	Chrome Plate	

**NOTE:** Galvin Specialised continually strive to improve their products. Specifications may change without notice.

## TOOLS REQUIRED


- Hex Key
- Adjustable spanner
- Power drill



## PRE-INSTALLATION - MOUNTING DETAILS


If the mounting holes do not already exist, mark out and drill the holes in the bench/trough as shown in rough in dimensions.

**Note: Before installation, all lines must be flushed. We recommend that a line strainer be installed prior to the bottle filler tap to eliminate any foreign material.**

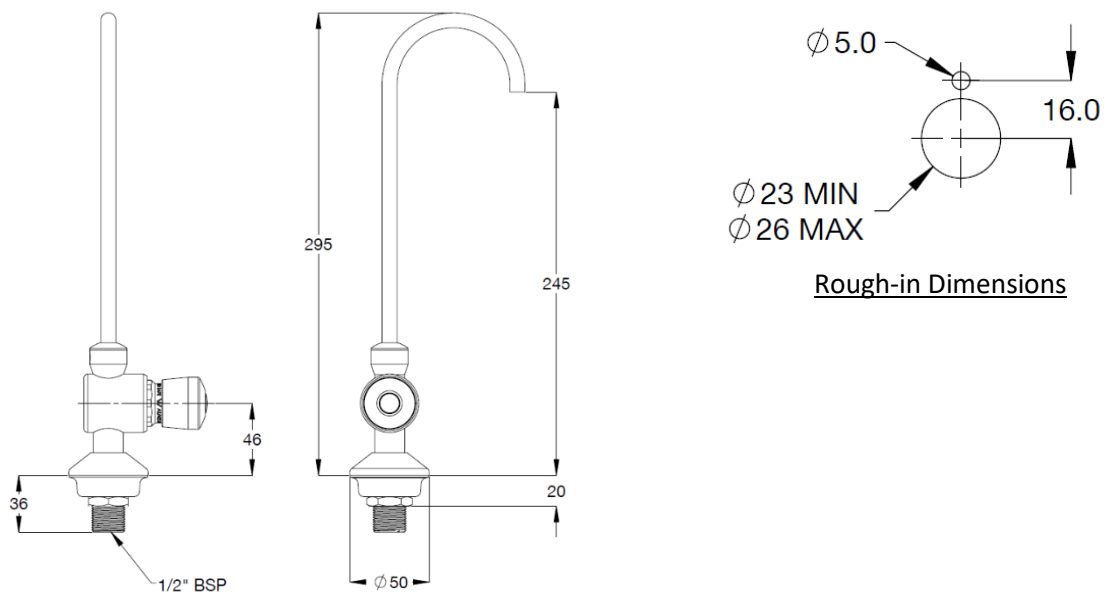


## INSTALLATION

**IMPORTANT:** Galvin Specialised products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.

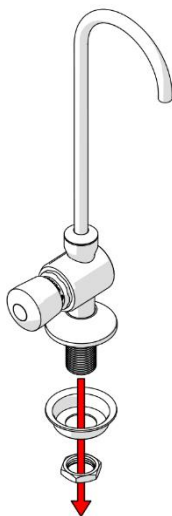


### 1. Disassemble

- Remove nut & cup washer from assembly.

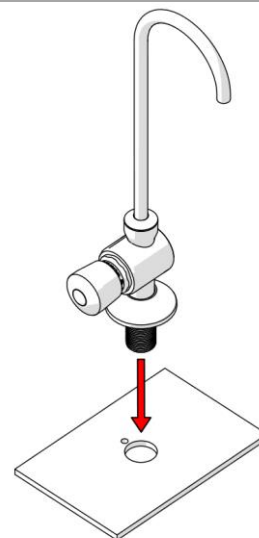


### 2. Fit bottle filler

- Align anti-rotation pin and fit bottle filler to basin as shown.

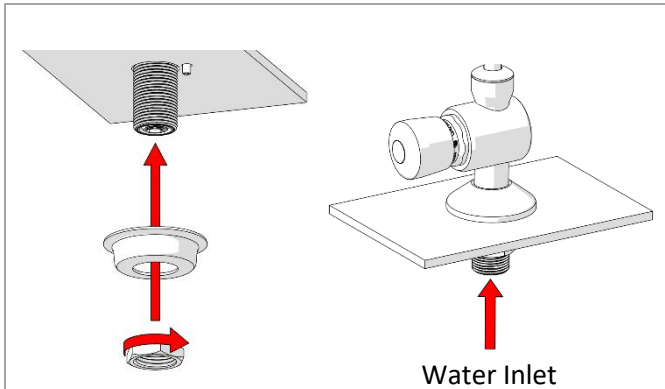


### 3. Secure bottle filler and connect water

- Fit cup washer and nut.
- Tighten assembly ensuring it cannot be turned once installed.
- Connect water inlet.

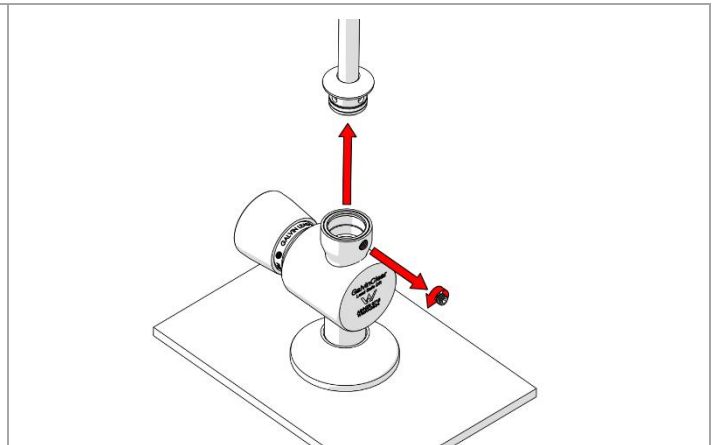

### 4. Remove spout


- Remove spout from assembly as shown.
- The spout can be rotated to 4 different positions to suit installation.

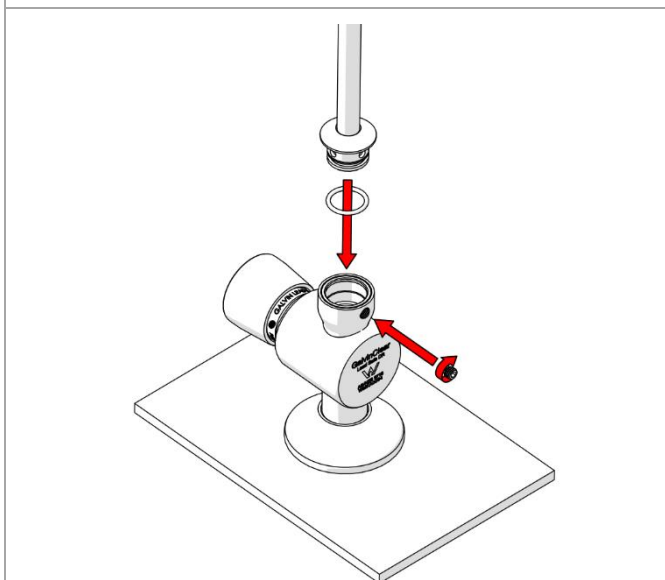

### 5. Fit & position spout


- Position the spout in the desired position ensuring the position hole lines up with the grub screw as shown.
- Ensure supplied O-Ring is fitted to the filler inlet.
- Insert the filler assembly into the outlet.

**Note: We recommend a small amount of an AS4020 approved silicone grease is used on the o-ring before assembly to ensure ease of fitment.**

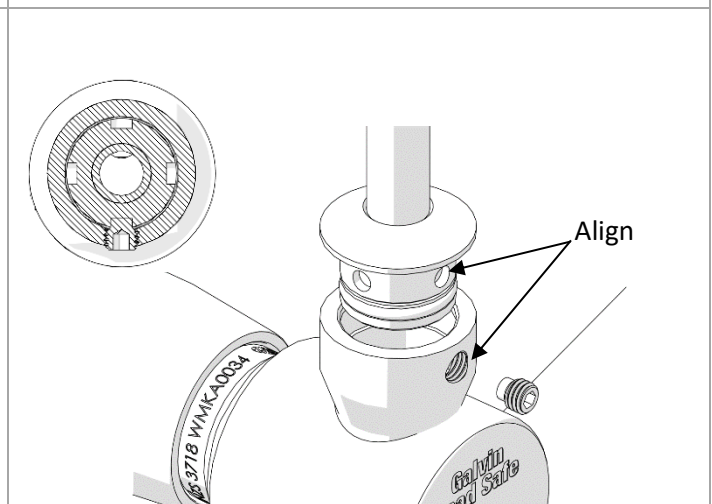

### 6. Secure spout

- Once positioned and the alignment is correct (see above), tighten the grub screw to secure the outlet.

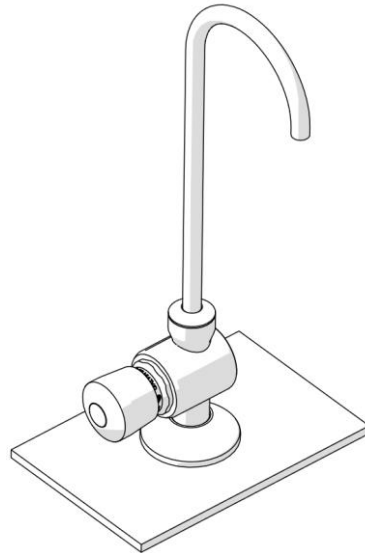

**7. Test**

- Once the bottle filler has been installed, turn on mains water and check for leaks and correct operation.

<b>TROUBLESHOOTING</b>		
<b>PROBLEM</b>	<b>CAUSE</b>	<b>RECTIFICATION</b>
Leaks	Incorrectly installed.	Follow the installation instructions and ensure the o-ring is correctly installed. Check for debris in the outlet.
Spout still rotates	Grub screw incorrectly installed.	Ensure the spout inlet position hole is lined up with the outlet grub screw hole. Re-install grub screw.
Water is not flowing	Water is turned off	Turn on water
Inconsistent flow	Blocked top assembly	Remove top assembly and clean.

## WARRANTY

The warranty set forth herein is given expressly and is the only warranty given by the Galvin Engineering Pty Ltd. With respect to the product, Galvin Engineering Pty Ltd makes no other warranties, express or implied. Galvin Engineering Pty. Ltd. hereby specifically disclaims all other warranties, express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

Galvin Engineering Pty Ltd products are covered under our manufacturer's warranty available for download from [www.galvinengineering.com.au](http://www.galvinengineering.com.au) Galvin Engineering Pty Ltd expressly warrants that the product is free from operational defects in workmanship and materials for the warranty period as shown on the schedule in the manufacturer's warranty. During the warranty period, Galvin Engineering will replace or repair any defective products manufactured by Galvin Engineering without charge, so long as the terms of the Manufacturer's warranty are complied with.

The remedy described in the first paragraph of this warranty shall constitute the sole and exclusive remedy for breach of warranty, and Galvin Engineering Pty Ltd shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labour charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, electrical or any other circumstances over which Galvin Engineering has no control. This warranty shall be invalidated by any abuse, misuse, misapplication, improper installation or improper maintenance or alteration of the product.

