Ezy-Drink® CP Lead Safe™ Vertical Push Button Drinking Bubbler Tap Fl RH



PRODUCT CODE:

- **170.21.33.01**

SPECIFICATIONS

- Drinking taps are designed to operate at full mains pressure.
- Rubber mouthguard is designed to help protect teeth while drinking.
- Rubber mouthguard is resistant to fungal and bacterial attack and has a high resistance to sunlight.
- Adjustable built-in flow restrictor.
- Made from Lead Safe™ DR Brass*

***IMPORTANT**: All Ezy-Drink® drinking taps are tested in accordance with AS 3718 and leave our premises in good working order.*

**Our Lead Safe™ product range is compliant with the Lead Free Requirements of the NCC 2022 Vol. Three, Clause A5G4(2) and NSF/ANSI 372.*

WARNINGS: Special attention to be paid on notes, photos, images, or drawings of assembly steps marked with the warning symbol.

TECHNICAL DATA

Inlet		G ½”- Female
Outlet		Rubber mouthguard
Headwork		Push Button
Working Pressure Range (kPa)	Min	50
	Max	500
Working Temperature Range (°C)	Min	5
	Max	60
Nominal Flow Rate (LPM)		1.7
Finish		Chrome

***NOTE:** Galvin Engineering continually strive to improve their products. Specifications may change without notice.*

TOOLS REQUIRED

- Spanner or adjustable crescent
- Screwdriver

© Galvin Engineering Pty Ltd

PRE-INSTALLATION

- Before installation, all lines must be flushed. We recommend that a line strainer be installed prior to drinking taps to eliminate any foreign material.



Spud Dimensions

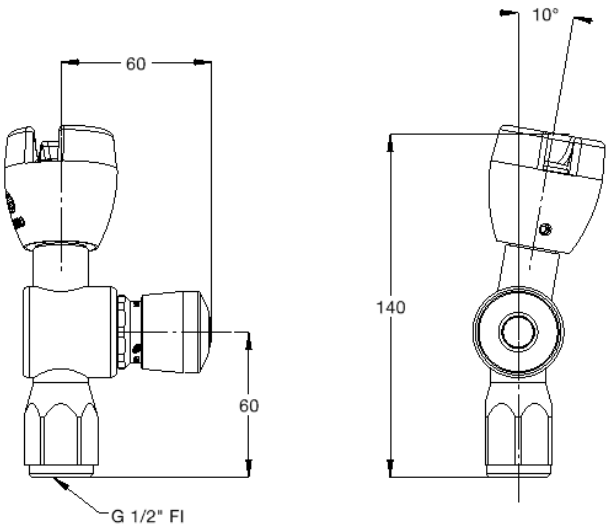

INSTALLATION

IMPORTANT: *Galvin Engineering products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.*

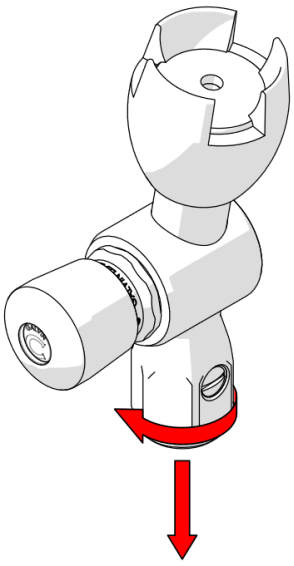

1. Fit tap assembly

- Fit the Bubbler Tap onto the bench.
- When applying thread tape or sealant to the inlet, ensure the opening is not obscured. Failure to do so may restrict or block the flow restrictor, affecting the flow of water.

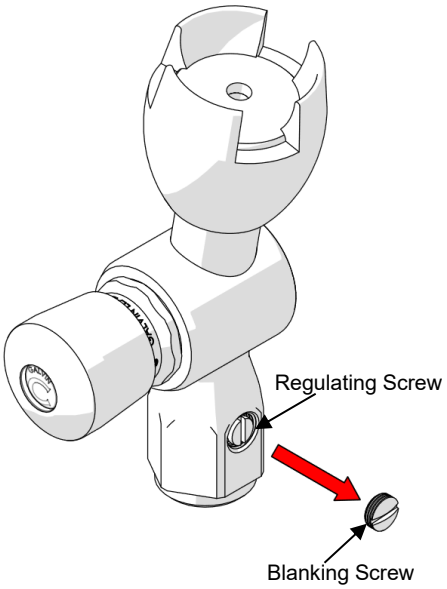

2. Flow adjustment

- To adjust water flow
  1. Remove the blanking screw
  2. Adjust the water height by turning the regulating screw
  3. Replace blanking screw

Note: The full range from minimum flow to maximum flow is only ¼ turn

© Galvin Engineering Pty Ltd

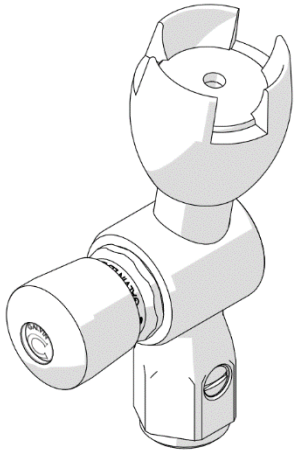

3. Testing

– Once the drinking tap has been installed and tested for leaks, the water height must be adjusted to suit the available pressure.

TROUBLESHOOTING		
PROBLEM	**CAUSE**	**RECTIFICATION**
Inconsistent flow	Blocked top assembly	Remove top assembly and clean
Water is not flowing from tap	Water is turned off	Turn on water
	Blocked flow regulating screw	Remove flow regulating screw and clean
Continuous flow	Top assembly loose or internally obstructed or damaged	Remove top assembly, clean with water and re-grease spindle if required
Rate of flow inadequate	The flow regulating screw may not be adjusted correctly	Remove blanking screw and adjust flow regulating screw as described
Button hard to press	The mains pressure might be too high	Reduce to below 500kPa (70PSI). Regrease spindle if required

© Galvin Engineering Pty Ltd

WARRANTY

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS/NZS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit www.galvinengineering.com.au to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.

Within Australia: **1300 514 074** Outside Australia: P: **+61 (0)8 9338 2344**
F: +61 (0)8 9338 2340
sales@galvinengineering.com.au
www.galvinengineering.com.au
ABN: 78 008 719 382
PERTH I SYDNEY I MELBOURNE I BRISBANE I ADELAIDE

Certified System Environment ISO 14001 SAI GLOBAL
Certified System Quality ISO 9001 SAI GLOBAL