

Product Installation Guidelines

Version 2, 4 June 2024, Page 1 of 3

Ezy-Drink® CP-BS Lead Safe™ Jug Filler Replacement Gooseneck Spout

PRODUCT CODES:

- 170.94.40.00



SPECIFICATIONS

- Spare parts kit for Ezy-Drink® Jug Filler Tap
- Made from Lead Safe™ DR Brass*

IMPORTANT: All Ezy-Drink® Jug Filler taps are tested in accordance with AS/NZS 3718 and leave our premises in good working order.

**Our Lead Safe™ product range is compliant with the Lead Free Requirements of the NCC 2022 Vol. Three, Clause A5G4(2) and NSF/ANSI 372.*

WARNINGS: Special attention to be paid on notes, photos, images, or drawings of assembly steps marked with the warning symbol.



TECHNICAL DATA


Working Pressure Range (kPa)	Min	50
	Max	500
Working Temperature Range (°C)	Min	5
	Max	60
Nominal Flow Rate (LPM)		N/A
Construction		Brass
Finish		Chrome
NOTE: Galvin Engineering continually strives to improve their products. Specifications may change without notice.		

TOOLS REQUIRED

- Hex Key


INSTALLATION

IMPORTANT: Galvin Engineering products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.

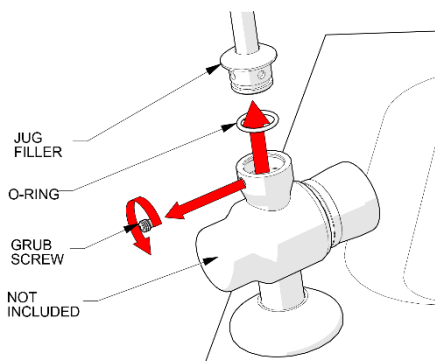

1. Remove existing jug filler


- Isolate mains water.
- Using a hex key, remove the grub screw on the existing filler.
- Once the grub screw has been removed, pull the filler assembly up to remove.
- Ensure the existing outlet is free of debris before installing the new filler.

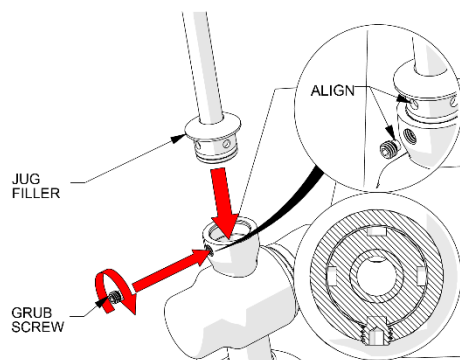

2. Fit new jug filler

- Fit supplied O-ring to the filler inlet.
- Insert the filler assembly into the existing outlet.
- Ensure the filler inlet sits flush with the outlet.
- Once the new filler has been inserted, rotate the filler to the desired position.
- Line up the position marker on the filler inlet with the grub screw hole in the outlet.
- Using a hex key, install the new supplied grub screw.

⚠ Note: We recommend a small amount of an approved silicone grease is used on the O-ring before assembly to ensure ease of fitment.

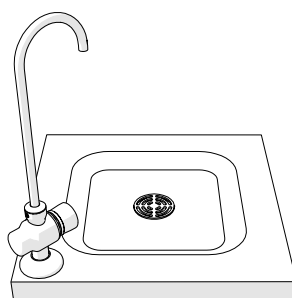

3. Test

- Check for leaks and test for correct operation.

TROUBLESHOOTING (Complete Unit)

PROBLEM	CAUSE	RECTIFICATION
Leaks	Incorrectly installed.	Follow the installation instructions and ensure the O-ring is correctly installed and the inlet sits flush on the outlet. Check for debris in the outlet.
Spout still rotates	Grub screw incorrectly installed.	Ensure the spout inlet position hole is lined up with the outlet grub screw hole. Reinstall grub screw. (See installation step 2)
Water is not flowing from bottle filler	Water is turned off	Turn on water
Inconsistent flow	Blocked top assembly	Remove top assembly and clean.

WARRANTY

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit www.galvinengineering.com.au to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.

Within Australia: **1300 514 074** Outside Australia: P: **+61 (0)8 9338 2344**

F: **+61 (0)8 9338 2340**

sales@galvinengineering.com.au

www.galvinengineering.com.au

ABN: 78 008 719 382

PERTH | SYDNEY | MELBOURNE | BRISBANE | ADELAIDE

