


# Ezy-Push® CP-BS Lead Safe TimeFlow Push Button Replacement Cartridge – No Time

**PRODUCT CODES:**

- 173.92.15.00



**SPECIFICATIONS**

- The Ezy-Push® time flow cartridge has a unique self-closing operation.
- Smooth round designs to facilitate easy clean and help reduce dirt and bacteria growth.
- Water saving, easy to operate and low maintenance.
- Supplied with hot (red), warm (yellow) and cold (blue) buttons depending on the requirement.

**IMPORTANT:** All Ezy-Push® Time Flow cartridges are tested in accordance with AS/NZS 3718 and leave our premises in good working order. Time may vary due to changes in temperature, pressure, flow rate and water quantity.


**TECHNICAL DATA**

Inlet	M26 x 19TPI - Male	
Outlet	N/A	
Headwork	Time Flow Cartridge	
Working Pressure Range (kPa)	Min	100
	Max	500
Maximum Working Temperature (°C)	Min	5
	Max	65
Nominal Flow Rate (LPM)	N/A	
Finish	Chrome	
Time (s)	0	

**NOTE:** Galvin Specialised continually strive to improve their products. Specifications may change without notice.


**PRE-INSTALLATION**

**Note:** Before installation, all lines must be flushed. We recommend that a line strainer be installed prior to Ezy-Push Time Flow cartridge taps to eliminate any foreign material.

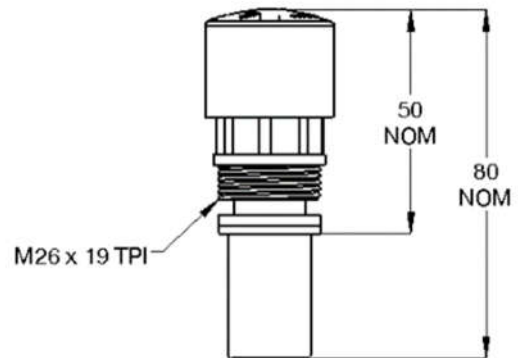


**INSTALLATION**

**IMPORTANT:** Galvin Specialised products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.

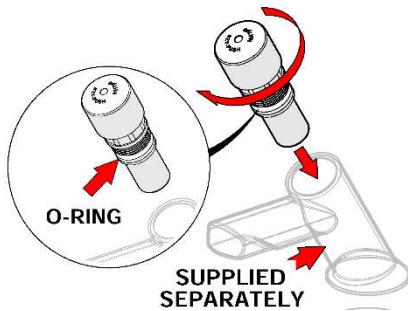

**1. Fit cartridge assembly**

- Fit the cartridge into the body (supplied separately) as shown.
- Tighten the cartridge assembly down firmly, ensuring a tight seal on the o-ring. Do not over tighten as this could restrict or stop the flow. If this occurs loosen the cartridge by ¼ of a turn.

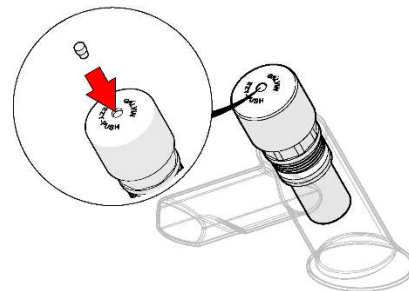

**2. Fit water temperature indicator and test**

- Fit the appropriate water temperature indicator (Cold, Hot or Warm).
- Once fitted, connect the water lines & turn on water.
- Check for leaks and correct operation.

**TROUBLESHOOTING (Complete Tap)**

PROBLEM	CAUSE	RECTIFICATION
Water is not flowing or inconsistent flow.	Blocked flow restrictor / dirt in the cartridge / water supply not on.	Remove flow regulator from outlet and remove debris. Install an inline strainer to stop further blockages. Ensure water supply is turned on.
Continous flow of water.	Top assembly cartridge loose or internally obstructed or damaged.	Remove cartridge, clean with water and re-grease spindle if required.
Rate of flow inadequate.	The flow restrictor may not be satisfactory due to inadequate supply pressure.	Remove flow restrictor and replace with a flow restrictor of different capacity to suit (available from Galvin Specialised).
Button hard to activate.	Mains pressure may be too high.	Reduce mains pressure to below 500kPa (70 PSI).

**WARRANTY**

The warranty set forth herein is given expressly and is the only warranty given by the Galvin Engineering Pty Ltd. With respect to the product, Galvin Engineering Pty Ltd makes no other warranties, express or implied. Galvin Engineering Pty. Ltd. hereby specifically disclaims all other warranties, express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

Galvin Engineering Pty Ltd products are covered under our manufacturer’s warranty available for download from [www.galvinengineering.com.au](http://www.galvinengineering.com.au) Galvin Engineering Pty Ltd expressly warrants that the product is free from operational defects in workmanship and materials for the warranty period as shown on the schedule in the manufacturer’s warranty. During the warranty period, Galvin Engineering will replace or repair any defective products manufactured by Galvin Engineering without charge, so long as the terms of the Manufacturer’s warranty are complied with.

The remedy described in the first paragraph of this warranty shall constitute the sole and exclusive remedy for breach of warranty, and Galvin Engineering Pty Ltd shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labour charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, electrical or any other circumstances over which Galvin Engineering has no control. This warranty shall be invalidated by any abuse, misuse, misapplication, improper installation or improper maintenance or alteration of the product.