


Ezy-Lever[®] CP-BS Lead Safe[™] Timeflow Cartridge for Knee Operated Valve (Suit 173.61.44.00 and TP08045)



PRODUCT CODE:

- 173.92.44.00 - 15 sec

SPECIFICATIONS

- Our range of AS/NZS 3718 approved tapware is reliable and durable.
- It is designed to suit the increasing need for the conservation of water.
- Constructed from Lead Safe* dezincification resistant brass Knee Operated tapware delivers a constant flow irrespective of pressure to provide a controlled stream.

* As 'lead free' is not currently defined by law in Australia and New Zealand, we have based our definition of Lead Safe[™] on the requirements of s1417 of the USA's Safe Drinking Water Act (SDWA) and the relevant US standards NSF61 / NSF372. The SDWA defines 'lead free' as "not more than a weighted average of 0.25% lead when used with respect to the wetted surface of pipes, pipe fittings, plumbing fittings and fixtures".

IMPORTANT: All Time Flow Taps are tested in accordance with AS/NZS 3718 and leave our premises in good working order. Time may vary due to changes in temperature, pressure, flow rate and water quantity.

TECHNICAL DATA

| | | |
|------------------------------|---------------------|-----|
| Assembly Thread | M26 x 19 TPI - Male | |
| Outlet | N/A | |
| Headwork | Time Flow Cartridge | |
| Working Pressure Range (kPa) | Min | 100 |
| | Max | 500 |
| Working Temperature (°C) | Min | 5 |
| | Max | 65 |
| Nominal Flow Rate (LPM) | N/A | |
| Construction | Brass | |
| Finish | Chrome | |


NOTE: Galvin Engineering continually strive to improve their products. Specifications may change without notice.

REQUIRED FOR INSTALLATION

- Spanner
- Grease

PRE-INSTALLATION

Note: Before installation, all lines must be flushed. We recommend that a line strainer be installed prior to Knee Operated Time Flow cartridge taps to eliminate any foreign material.




INSTALLATION


IMPORTANT: Galvin Specialised products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.




1. Turn off water supply
 - Prior to installation turn off water supply.




2. Unscrew top sleeve.

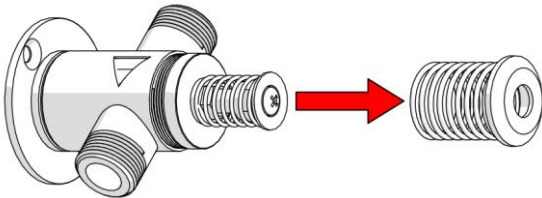

3. Remove bigger spring

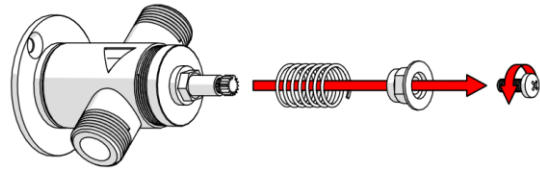

4. Remove smaller spring.
 - Unscrew the top assembly screw using cross screwdriver.
 - Remove the retaining nut and the smaller spring.

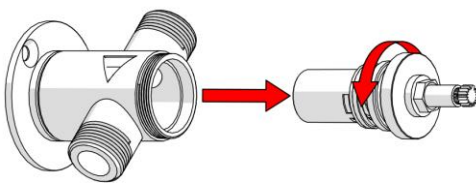

5. Replace Timeflow Cartridge
 - Fit the new timeflow cartridge using a 13 mm spanner.



6. Reassemble the tap
 - Reverse steps 2 to 4.
 - When installation is complete, slowly open water supply and inspect for leaks.
 - Check for correct operation.

TROUBLESHOOTING

| PROBLEM | CAUSE | RECTIFICATION |
|-------------------------------|-------------------------------------|---|
| Taps are dripping water | Dirt Debris in cartridge | Remove and clean cartridge |
| | Faulty cartridge | Replace cartridge |
| Water is not flowing from tap | Water is turned off | Turn on water |
| | Flow regulator is blocked by debris | Remove flow regulator from tap and remove debris. Install an inline strainer. |

WARRANTY

The warranty set forth herein is given expressly and is the only warranty given by the Galvin Engineering Pty Ltd. With respect to the product, Galvin Engineering Pty Ltd makes no other warranties, express or implied. Galvin Engineering Pty. Ltd. hereby specifically disclaims all other warranties, express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

Galvin Engineering Pty Ltd products are covered under our manufacturer’s warranty available for download from www.galvinengineering.com.au Galvin Engineering Pty Ltd expressly warrants that the product is free from operational defects in workmanship and materials for the warranty period as shown on the schedule in the manufacturer’s warranty. During the warranty period, Galvin Engineering will replace or repair any defective products manufactured by Galvin Engineering without charge, so long as the terms of the Manufacturer’s warranty are complied with.

The remedy described in the first paragraph of this warranty shall constitute the sole and exclusive remedy for breach of warranty, and Galvin Engineering Pty Ltd shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labour charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, electrical or any other circumstances over which Galvin Engineering has no control. This warranty shall be invalidated by any abuse, misuse, misapplication, improper installation or improper maintenance or alteration of the product.