


## Safe-Cell® Manual Prison Extended Shower Rose - NPT

### PRODUCT CODES:

- 40691DUS

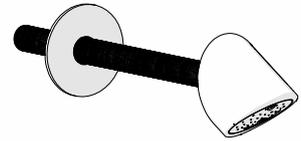

### SPECIFICATIONS

- The Safe-Cell® Vandal Resistant Shower Rose 65 provides both anti-vandalism and anti-ligature features.
- This shower is used extensively in high risk, high security applications such as prisons, correctional facilities, and detention centres.
- Designed for maximum protection against vandalism.
- Constructed from heavy duty components and comes complete with special tamper-resistant screws.
- For use with high pressure plumbing systems between 150 & 500kPa.
- Special consideration may be required when used with low water pressure systems and components.
- Designed to suit wall thickness up to 275mm.
- Chrome plate finish.

**IMPORTANT:** All Safe-Cell® Vandal Resistant Shower Roses are tested and leave our premises in good working order.

### TECHNICAL DATA

Inlet	1/2" NPT - Male	
Outlet	Shower Rose	
Headwork	N/A	
Working Pressure Range (kPa)	Min	150
	Max	500
Working Temperature Range (°C)	Min	5
	Max	70
Nominal Flow Rate (LPM)	7	
Construction	Brass	
Finish	Chrome	

**NOTE:** Galvin Specialised continually strive to improve their products. Specifications may change without notice.


### TOOLS REQUIRED

- Thread tape or sealant.
- Hex key.
- Power drill.

**PRE-INSTALLATION**

**MOUNTING DETAILS – HOLE CENTRES**


- The rough in details have been provided to show correct fitment of the Vandal Resistant Shower unit (see below image).
- Recommended installation height above floor level is 2 meters (6'6").

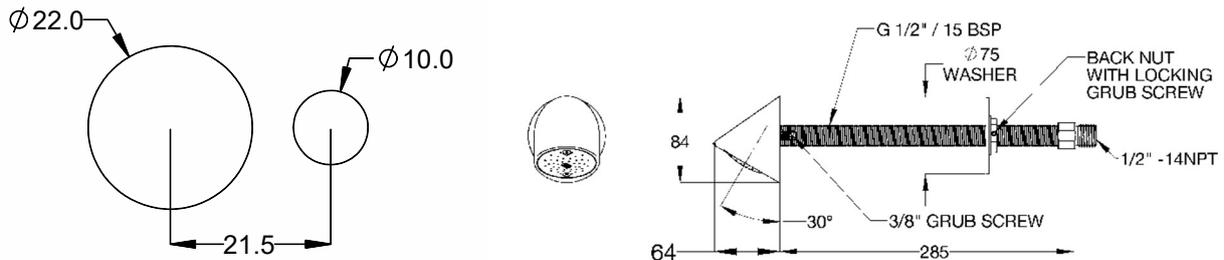

**INSTALLATION**


**INSTALLATION COMPLIANCE:** Galvin Specialised products must be installed in accordance with these installation instructions and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.

**IMPORTANT:** Whilst our product designs take into account a broad range of installation types and surfaces, it is important that surfaces which fixtures are mounted to are flat and free from defect. This is especially important when installing product ranges that have been designed for correctional and health facilities, where special attention is required to minimise ligature points and areas for concealment of contraband. In addition to ensuring the products are fitted securely and in accordance with the following instructions, consideration shall be given to the use of non-pick mastics such as BASF Sonolastic “Ultra” to ensure a high quality and safe installation.

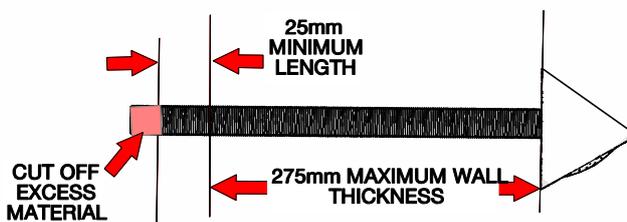


**1. Measure extension nipple**

- Insert shower body through the  $\text{\O}22\text{mm}$  hole in the wall.
- Ensuring a minimum of 25mm is protruding from the wall, mark where to remove excess material.
- Remove shower body from wall, cut where marked, removing any burrs.

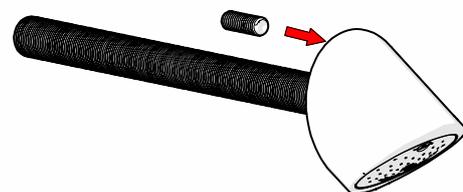


**2. Fit grub screw**

- Fit supplied 3/8" Whitworth grub screw into the tapped hole on the back of the shower body and tighten.

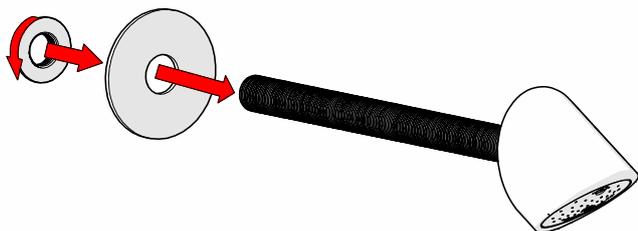


**3. Fit shower body**

- Re-insert the shower body through the wall and secure using the large galvanised washer and flanged back nut.
- Ensure anti-rotation grubs screw locates into drill hole.

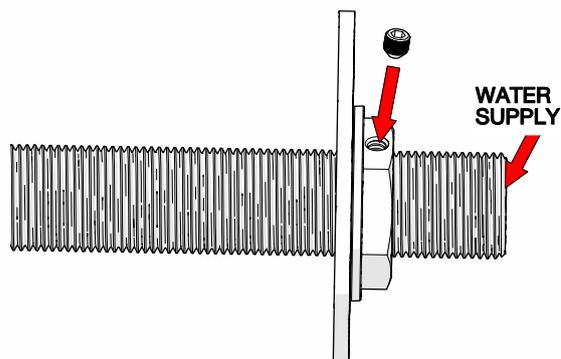

**4. Fit the grub screw**

- Fit the supplied grub screw into the flanged back nut and lock securely.
- Connect water supply, ensuring to apply thread tape or sealant to create a water tight seal.

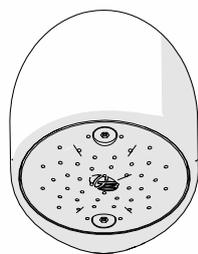

**5. Checking & testing**

- Turn on water supply, inspect the tap and check for any leaks.

**Note: Never operate without a flow restrictor, as will deliver full mains pressure with unrestricted flow.**

TROUBLESHOOTING		
PROBLEM	CAUSE	RECTIFICATION
Shower is dripping water	Head-works are worn or damaged	Remove and inspect the head-works, remove debris and/or replace head parts if damaged
Inconsistent flow	Blocked flow restrictor	Remove flow regulator from body and remove debris. Install an inline strainer to stop further blockages.
Leak from behind body	Insufficient sealant	Apply more sealant
Water is not flowing from tap	Water is turned off	Turn on water
Rate of flow inadequate	The flow restrictor may not be satisfactory due to inadequate supply pressure	Remove flow restrictor and replace with a flow restrictor of different capacity to suit (available from Galvin Specialised)

## WARRANTY

The warranty set forth herein is given expressly and is the only warranty given by the Galvin Engineering Pty Ltd. With respect to the product, Galvin Engineering Pty Ltd makes no other warranties, express or implied. Galvin Engineering Pty. Ltd. hereby specifically disclaims all other warranties, express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

Galvin Engineering Pty Ltd products are covered under our manufacturer's warranty available for download from [www.galvinengineering.com.au](http://www.galvinengineering.com.au) Galvin Engineering Pty Ltd expressly warrants that the product is free from operational defects in workmanship and materials for the warranty period as shown on the schedule in the manufacturer's warranty. During the warranty period, Galvin Engineering will replace or repair any defective products manufactured by Galvin Engineering without charge, so long as the terms of the Manufacturer's warranty are complied with.

The remedy described in the first paragraph of this warranty shall constitute the sole and exclusive remedy for breach of warranty, and Galvin Engineering Pty Ltd shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labour charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, electrical or any other circumstances over which Galvin Engineering has no control. This warranty shall be invalidated by any abuse, misuse, misapplication, improper installation or improper maintenance or alteration of the product.

Within Australia: 1300 514 074 Outside Australia: P: +61 (0)8 9338 2344

F: +61 (0)8 9338 2340

[sales@galvinengineering.com.au](mailto:sales@galvinengineering.com.au)

[www.galvinengineering.com.au](http://www.galvinengineering.com.au)

ABN: 78 008 719 382

PERTH | SYDNEY | MELBOURNE | BRISBANE | ADELAIDE

