

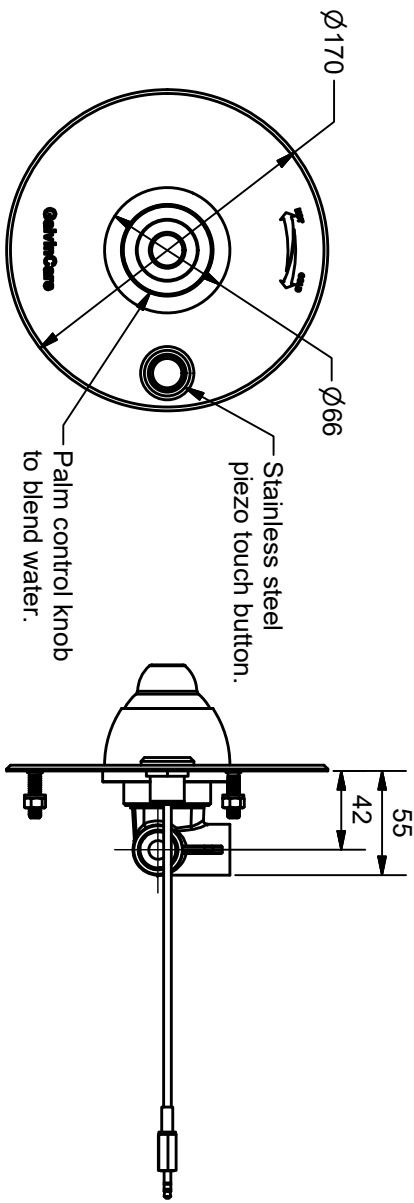


REVISION HISTORY				
REV	DATE	DESCRIPTION	BY	CHKD
2	02/11/2016	CONTROL SIZE & GRAPHICS UPDATED	PH	DB

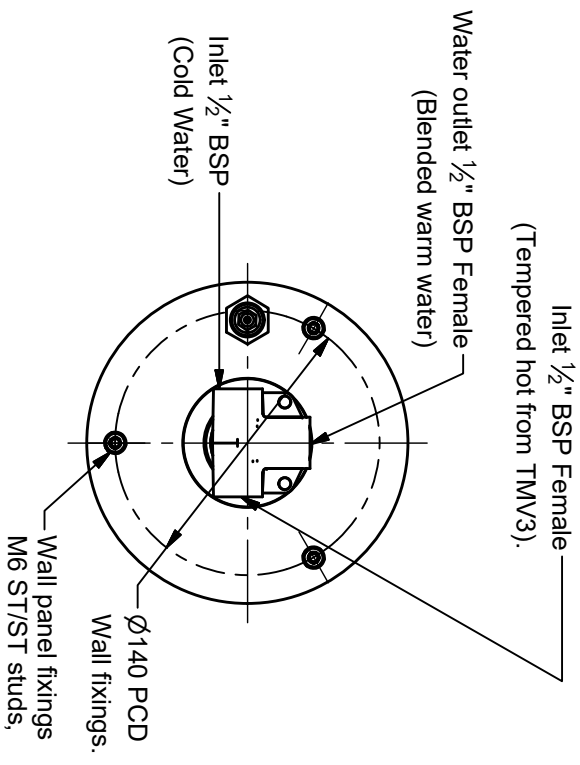

Piezo touch button cable (4m) fitted with 3.5mm stereo jack plug. 0 Volt switching, SELV, to suit Wallgate electronic control units.

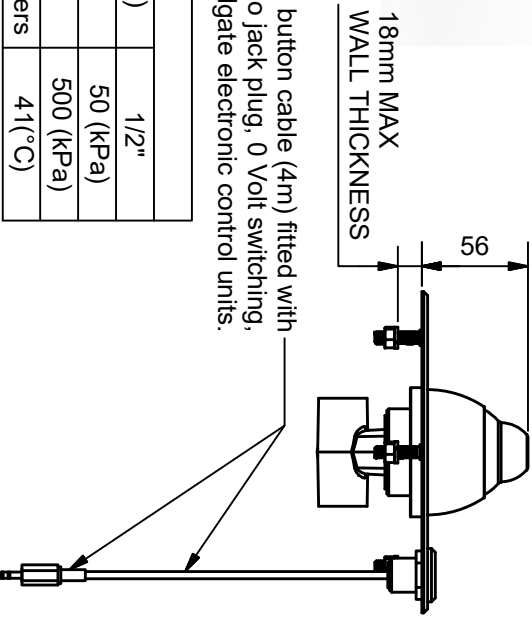

TECHNICAL DATA	
Inlet & Outlet water connections (BSP Female)	1/2"
Minimum Working Pressure	50 (kPa)
Maximum Working Pressure	500 (kPa)
Recommended water inlet temperature for showers	41(°C)

© 2016 Copyright THIS DRAWING IS THE PROPERTY OF WALLGATE LIMITED AND IS ISSUED ON THE STRICT UNDERSTANDING THAT THE INFORMATION CONTAINED WILL NOT BE REPRODUCED, COPIED OR USED WITHOUT PRIOR AGREEMENT OF WALLGATE LTD.



TITLE: PALM CONTROL SHOWER BLENDING VALVE
Drq No: SMVA20
 Model/Client/Project:

MATERIAL:
FINISH:

Limits: (unless stated)
 ± 0.25mm (sheetmetal)
 ± 0.10mm (machined)
 ± 2.00mm (pattern)
 ± 5.00mm (moulded)

All dimensions in mm.
 All angles 90° (unless stated)

Scale:
 A4 3rd