

GalvinLab[®] CP-BS Lead Safe[™] Lab Set Vandal Resistant Top Assembly

PRODUCT CODES:

- 167.94.10.01 (Cold Handle & Button)
- 167.94.10.02 (Hot Handle & Button)



SPECIFICATIONS

- Vandal resistant handle with a locking ring to secure the handle to the spindle, which may only be removed using the key provided.
- Standard with jumper valve.
- High quality chrome finish for easy cleaning and hygiene maintenance.
- Australian Made; therefore, spare parts and support are available locally, reducing costs of down time on maintenance.
- Lead Safe[™] brass construction*

IMPORTANT: All GalvinLab taps are tested in accordance with AS/NZS 3718 and leave our premises in good working order.

*Our Lead Safe[™] product range is compliant with the Lead Free Requirements of the NCC 2022 Vol. Three, Clause A5G4(2) and NSF/ANSI 372.

WARNINGS: Special attention to be paid on notes, photos, images, or drawings of assembly steps marked with the warning symbol.



TECHNICAL DATA


Inlet	G 5/8" BSP – Male	
Outlet	N/A	
Headwork	Jumper Valve	
Working Pressure Range (kPa)	Min	5
	Max	65
Working Temperature Range (°C)	Min	50
	Max	500
Nominal Flow Rate (LPM)	N/A	
Construction	Brass	
Finish	Chrome	

NOTE: Galvin Engineering continually strive to improve their products. Specifications may change without notice.

TOOL REQUIRED

- Spanner or adjustable crescent

DIMENSIONS

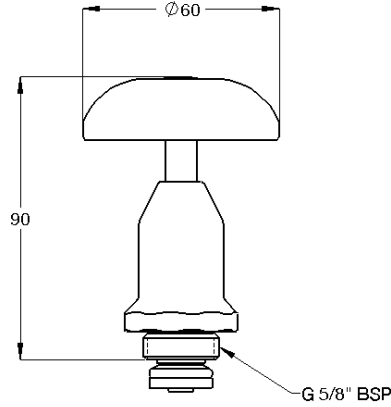


167.94.10.01 / 167.94.10.02

INSTALLATION

INSTALLATION COMPLIANCE: Galvin Engineering products must be installed in accordance with these installation instructions and in accordance with AS/NZS 3500, the PCA and your local regulatory requirements. Water and/or electrical supply conditions must also comply to the applicable national and/or state standards. Failing to comply with these provisions shall void the product warranty and may affect the performance of the product.



- 1. Replace existing top assembly**
 - Remove existing top assembly and replace with new top assembly
 - Use an adjustable spanner to tighten

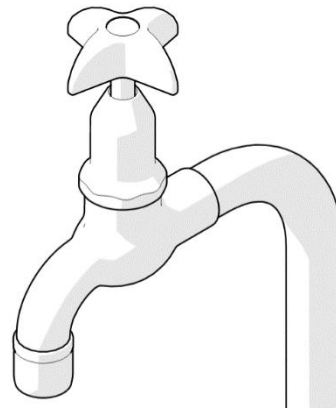

- 2. Testing**
 - Turn on water supply and check for correct operation

TROUBLESHOOTING		
PROBLEM	CAUSE	RECTIFICATION
Inconsistent flow	Blocked top assembly	Remove top assembly and clean
Water is not flowing from tap	Water is turned off	Turn on water
	Blocked flow restrictor	Remove restrictor and clean/replace
Continuous flow	Top assembly cartridge loose or internally obstructed or damaged	Remove cartridge, clean with water and re-grease spindle if required

WARRANTY

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit www.galvinengineering.com.au to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.

